
#50888 **ACOUSTICAL VISION (1-3/4" DOORS)**



#6384 **ACOUSTICAL VISION (2-1/8" DOORS OR GREATER)**

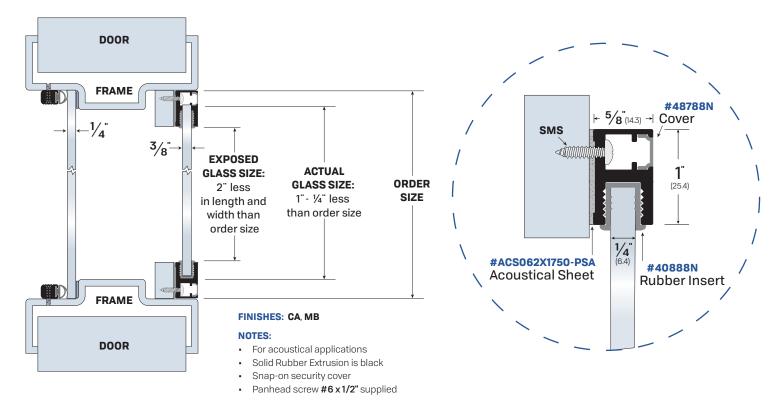

FINISHES: CA, MB

NOTES:

- · Please specify thickness of the door when ordering.
- Acoustical Composite Sheet (ACS) by Legacy provides sound absorption between glass plates.
- · Glass plates with two different thicknesses required to minimize sound transmission.
- · Sound control performance on this opening may achieve up to 44STC.
- · Glass to be supplied by other manufacturers.
- #7383 corners are standard mitered cut.