

How To Order: Hinges

Example #1019CA-HD-72

PART NUMBER & FINISH - OPTIONS - LENGTH
1019 CA - HD - 84

PART #	115	1179	1479
	1019	1279	1559
	1027	1359	10059
	1059	1379	

FINISH
Finishes vary by product. Please check available finishes listed for each product.
CA - Clear Anodized Aluminum
DB - Dark Bronze Anodized Aluminum
MB - Matte Black Powder Coat
SS - Stainless Steel

OPTIONS
Options vary by product. Please check available options listed for each product.
Blank - No Option **HD** - Heavy Duty **RH** - Right-Handed
CE - Concealed Electric **HT** - Hospital Tip **SF** - Security Fasteners
EPT - Electrical Power Transfer **LH** - Left-Handed **ST** - School Tip

LENGTH For #1019: Please specify to nearest 1/16". For all Cam Lift and #1027, Specify each (EA).




#1059SS



#1019CA

#1019 FULL MORTISED CONTINUOUS HINGE

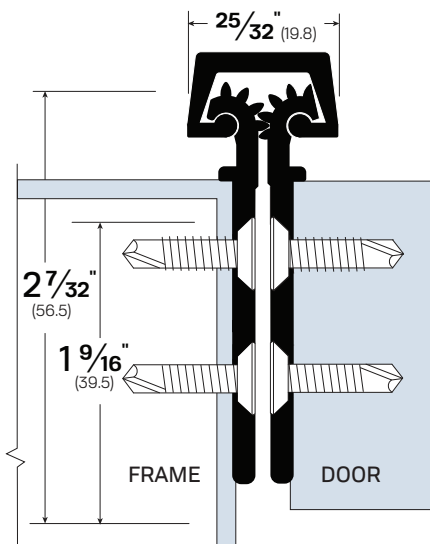

Designed for smooth, effortless door swing, our Continuous Door Hinge System integrates two extruded aluminum "geared" segments in a cover channel, with support bearings of long-wearing, self-lubricating Delrin™ which absorb shock and distribute weight evenly. The hinge rotates a full 180 degrees. Well suited for both new and retrofit construction, the tamper-proof continuous hinge performs effectively on doors up to nine feet. Constructed from heavy-gauge aluminum, both models are offered in a choice of two finishes.


FINISHES: CA, DB
OPTIONS: HD, EPT, CE, HT, ST, SF

- NOTES:**
- Grey color
 - 16 hinges for standard hinge (approx. double for HD option -- see p.94)
 - Door/ frame reinforcements are not required in most applications
 - 5/16" clearance on square edge door, 3/8" clearance on beveled door



LEGACY	NGP	PEMKO	ZERO
1019	HD1100	FMSLE-HD1	-

#1027 ELECTRIFIED HINGE

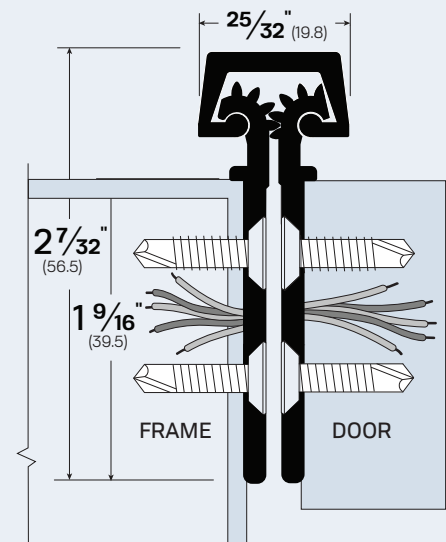

FINISHES: CA, DB

- NOTES:**
- Power Transfer Technology
 - 26-gauge
 - 6 wire standard, 8 wire optional
 - Tamper-resistant
 - Weather-resistant

NO COMPETITOR EQUIVALENTS

Specialty Hinges