


Adjustable Seals

These systems provide adjustability that helps compensate for gaps due to imperfect door alignment at installation, or resulting from temperature and humidity changes, in order to optimize sealing performance. Adjustments are made simply with a few turns of a screwdriver.



#5077CA Installed on head of frame.

#5077

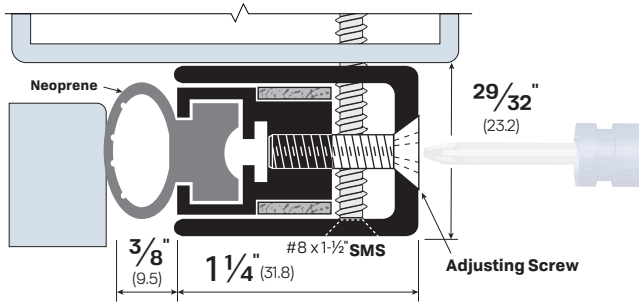


FINISHES: CA, BK, WP, SP, SS

OPTIONS: BRW - Brillow
FL - Fire Label
EMI/RFI - Electromagnetic/Radio Frequency Interference

NOTES:


- Used with a cased open frame
- Replacement neoprene - Part #4563N

LEGACY	NGP	PEMKO	ZERO
5077	1038N	319N	770AA



#5077CA

#5077-FX

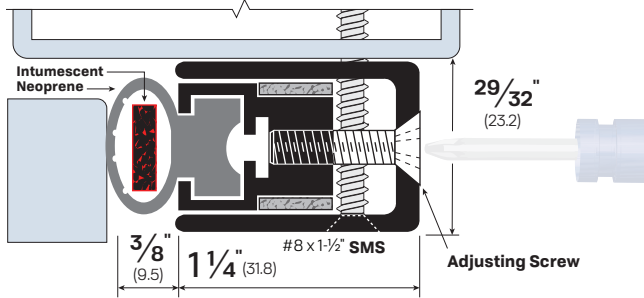

FINISHES: CA, BK, WP, SP, SS

OPTIONS: FX - Intumescent for Fire/Acoustical applications

NOTES:


- Used with a cased open frame
- Replacement FX - Part #13312
- Replacement neoprene - Part #4563N

LEGACY	NGP	PEMKO	ZERO
5077-FX	-	-	770FS



#5077CA-FX

#5071

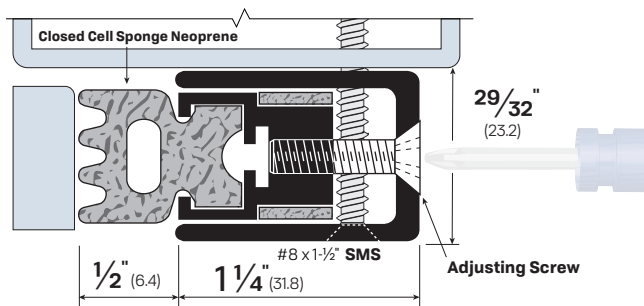

FINISHES: CA, BK, WP, SP, SS

NOTES:


- Used with a cased open frame
- Replacement closed cell sponge neoprene - Part #4363SPR

LEGACY	NGP	PEMKO	ZERO
5071	103N	350CSR	170AA



#5071CA

#50777

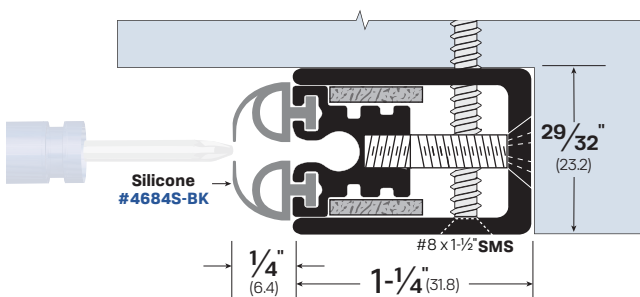

FINISHES: CA, BK, WP, SP, SS

NOTES:

- Replacement silicone - Part #4684S-BK Available in Black (-BK)
- Adjustable range is up to 5/16" (7.9)

LEGACY	NGP	PEMKO	ZERO
50777	-	-	7770AA

Perimeter Seals