


## Adjustable Seals

These systems provide adjustability that helps compensate for gaps due to imperfect door alignment at installation, or resulting from temperature and humidity changes, in order to optimize sealing performance. Adjustments are made simply with a few turns of a screwdriver.



#5077CA Installed on head of frame.

### #5077

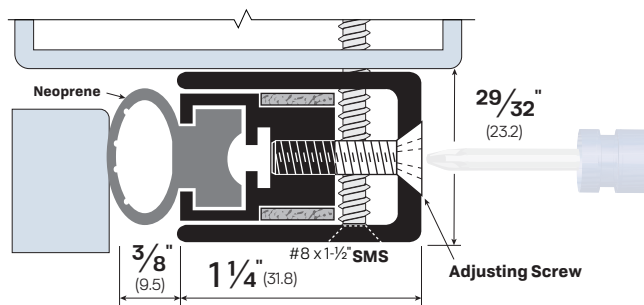

**FINISHES:** CA, BK, WP, SP, SS

**OPTIONS:** BRW - Brillow

FL - Fire Label

EMI/RFI - Electromagnetic/Radio Frequency Interference

**NOTES:**


- Used with a cased open frame
- Replacement neoprene - Part #4563N

LEGACY	NGP	PEMKO	ZERO
5077	1038N	319N	770AA



#5077CA

### #5077-FX

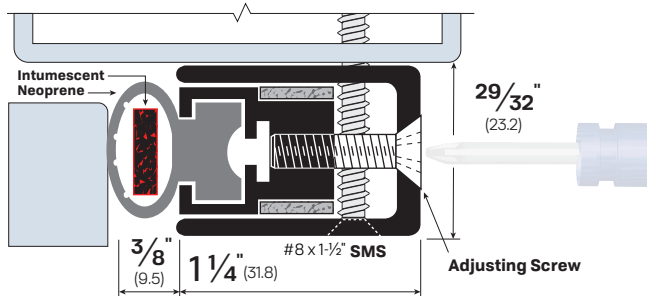

**FINISHES:** CA, BK, WP, SP, SS

**OPTIONS:** FX - Intumescent for Fire/Acoustical applications

**NOTES:**


- Used with a cased open frame
- Replacement FX - Part #13312
- Replacement neoprene - Part #4563N

LEGACY	NGP	PEMKO	ZERO
5077-FX	-	-	770FS



#5077CA-FX

### #5071

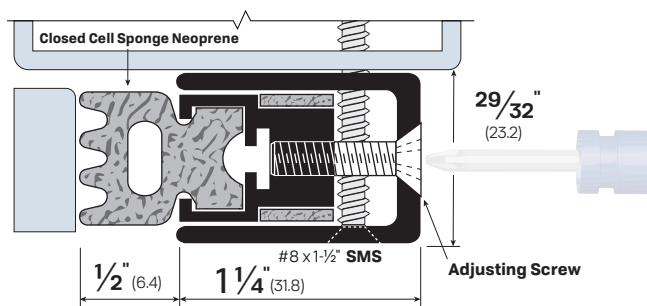

**FINISHES:** CA, BK, WP, SP, SS

**NOTES:**


- Used with a cased open frame
- Replacement closed cell sponge neoprene - Part #4363SPR

LEGACY	NGP	PEMKO	ZERO
5071	103N	350CSR	170AA



#5071CA

### #50777

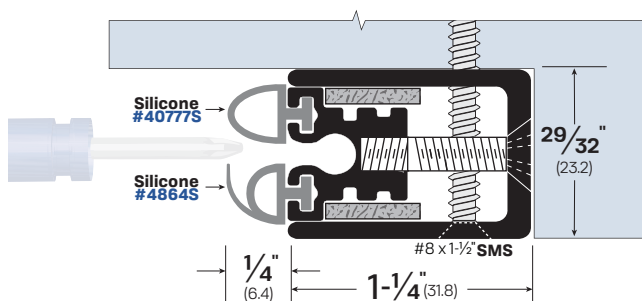

**FINISHES:** CA, BK, WP, SP, SS

**NOTES:**

- Replacement closed cell sponge neoprene - Part #4363SPR
- Replacement silicone - Part #40777S Available in Black (-BK) and White (-WH)
- Replacement silicone - Part #4684S Available in Black (-BK) and White (-WH)
- Adjustable range is up to 5/16" (7.9)

LEGACY	NGP	PEMKO	ZERO
50777	-	-	7770AA